




DEXRON® VI ATF

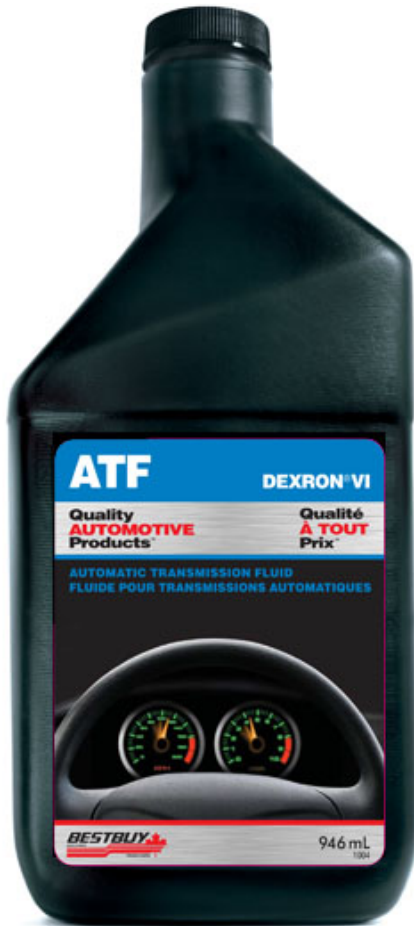

Q.A.P DEXRON® VI ATF is a premium synthetic blend transmission fluid designed to provide unparalleled performance in automatic transmissions in vehicle manufactured by General Motors. Enhanced resistance to oxidation, shear and viscosity stability prevents the formation of deposits for up to twice the service life of previous generation DEXRON® IIIH

Q.A.P DEXRON® VI ATF offers excellent fluidity at low temperature allowing better cold lubrication and faster flow rates reducing warm up time. It has very good thermal stability, protects better and longer to reduce wear and extend the transmission life. It has a very good anti-corrosive and anti-foam characteristic. Its synthetic low friction properties ensure less vibration, slippage and shutter, even during rapid acceleration. Improved compatibility with internal transmission components also provides transmission life durability.

Q.A.P is DEXRON® VI approved by General Motors. It is also backwards compatible making it suitable for use in transmissions where DEXRON® III-H, III-G, III-E, & II are required.

Where MERCON® V ATF is required, use Q.A.P MULTI-VEHICLE ATF or where MERCON® or older DEXRON® specifications are required, use Q.A.P DEX/MERC ATF.

FEATURES

- Meets or exceeds the following industry standards:
- DEXRON® VI (approved)
- Suitable for use where Dexron® IIIH, IIIG, IIE, or II is recommended
- Improves friction durability
- Enhanced anti-wear protection for critical transmission components
- Improved deposit control for better transmission cleanliness

BENEFITS

- Maximum value service life in heavy duty fleets- up to 100,000 miles or 50,000 miles in severe duty
- Exceptional low temperature fluidity
- Excellent resistance to degradation due to heat and oxidation
- Eliminates slippage and shudder
- Extends integrity and operational life of critical components

AVAILABLE SIZES





DEXRON® VI ATF

TYPICAL PERFORMANCE RESULTS

COLOUR	Red
DENSITY, KG/L @ 15°C(60°F) D-4052	0.846
VISCOSITY D-445 cSt @ 40°C	29.8
cSt @ 100°C	6.0
VISCOSITY INDEX D-2270	151
BROOKFIELD VISC. D-2983 cP @ -40°C (-40°F)	12,030
POUR POINT °C (°F) D-97	-54
FLASH POINT °C (°F) D-92	206

AVAILABLE SIZES & CODES

	946ml. (1 US qt)	3.78L (1 US Gal)	18.9L (5.0 US Gal)	205L (54.2 US Gal)
Q.A.P DEXRON® VI ATF	QDEXRONVI-1 FX0001715			

Available Exclusively at
Bestbuy Distributor Locations

Quality
AUTOMOTIVE
Products™