

**COOLANT DAM**



Model T-1000

Simple tool that holds coolant inside the engine when other components are removed for repair or replacement.

**LIT PLUGS**



- Automotive industry and Light Truck
- LED Light is visible from 50' to monitor from a distance



3600116



3600117



3600118



3600119

**REPLACEMENT CORDS**

Lit Cord	Std Cord	Cord Length
3600116	3600006	5" (1.52m)
3600117	3600005	5" (1.52m)
3600118	3600001	5" (1.52m)
3600119	3600082	5" (1.52m)
3600119	3600083	5" (1.52m)

**CARTRIDGE HEATERS**

Fits Dodge, Jeep and Chrysler Applications



Part No.  
3100131

Replacement Cord:  
3600121

Model year application available in the Zerostart catalog at phillipsandtemro.com.

**BLANKET STYLE BATTERY HEATER**



- Blanket style heater warms battery core to 60° – 70° above ambient temperature for quick starts



Part No.	Length	Wattage	Battery Size
2800055	28"	50	Series 26, 26R, 70
2800063	36"	80	Series 24, 24F, 27, 27F, 74
2800071	72"	160	Truck batteries, Series – parallel systems

**HEAT MAGNET**



Part No. 3400017

- Versatile 200 Watt – 120 Volt AC

**SILICONE BATTERY PAD HEATER**



- Maintains available cold cranking amps in cold weather by warming the batteries

	Watts	Volts	Amps	Pad Size
3400038	180	120	1.5	13" x 20.5"

Customer Service: 800-328-6108

Email: sales@phillipsandtemro.com • customerservice@phillipsandtemro.com

www.phillipsandtemro.com

**PHILLIPS & TEMRO**  
industries®



**PERFECT STEEL™ QuikStik®**

200576FE

0.25 oz. segments, 3 oz. per strip  
Dimensions : Low profile,  
0.1875" height, 1" width



**PERFECT STEEL™ QuikRoll®**

200576FER

0.25 oz. segments  
Dimensions : Low profile,  
0.1875" height, 1" width



**ExelAir by Milton Digital Tire Tread Depth Gauge**

EX448DIG

- Digital display is easy to read
- Zero setting in any position
- Includes an automatic shut off to preserve battery life
- Pressure range of 0 to 100 pounds per square inch
- 0.1875" height, 1" width



**Diesel Deep Clean**

20872

473ml



**Anti-Gel Cold Weather Diesel Treatment**

20865

946ml

**November 2016**



**Nitrile Disposable,**  
4 MIL, lightly powdered, BLUE, 100/bx

792455P-L



**Chevron Mudflaps**

671-4588 24x24



**Tire Repair Kit**

TS60K



**westernstates**  
MANUFACTURING



**15W40 CJ-CI-4**  
**18.9L Pail**  
 Q15W40CJ4-19



**QAP 0W20 Motor Oil**  
**Full Synthetic**  
 QSYN0W20-1x6  
 Sold in case of 6



**DEXRON 946ml**  
 QDEXRON-1  
 Sold by case of 12

**Quality**  
**AUTOMOTIVE**  
**Products™**

\* EHC extra

**2" Bristle Roloc Disc Kit**  
 18696

**3" Bristle Roloc Disc Kit**  
 18697

**3M**



**High Heat Epoxy Putty - 2 oz.**  
 8297F



**Respirator Starter Kit # 9291 & 9391 Professional Series™**  
**Facepiece Organic Vapor - P95 Approved - Bag**

9291-KIT - Medium  
 9391-KIT - Large

**GERSON®**  
 Progressive With Purpose



**SCOTT® Towels**  
 01010



**Kleenex® Facial Tissue**  
 21400



**Brown Roll Towels**  
 02021

**Kimberly-Clark**  
 PROFESSIONAL®



**Underhood Light**  
 111036

- 1200 Lumens 4 hours
- 700 Lumens 8 hours
- 36 LED
- Rechargeable lithium ion battery
- Bracket extends up to 78"
- Independant dual switches
- Magnets & hooks in handle
- AC and DC chargers included

**CLIGHT**  
 BETTER BY DESIGN.

**Car Wash Bucket**  
 94102C

**HOPKINS**  
 Canada  
 Home of the Mallory Brand Since 1900




**3-Pack Detail Brush Set**  
 93019C



**Jump Starter by Omega Pro**  
 80600 OMEGA PRO

Features:

- The world's slimmest 'pocket' jump start at this power level
- High end and high capacity internal lithium-polymer battery
- Will start a 12 V gasoline engine (up to 5 liter) with internal voltage of just 0.05v in a car battery
- Re-charge from a laptop computer or 5v USB mains charger plug (not supplied)
- 'SMART' jump start cables with thickened copper core
- 3 in 1 mobile charging cables
- 0.5w LED torch and SOS signal
- Safe and reliable technology
- Excess demand failsafe cut-out to protect unit and car
- Microcomputer control circuitry
- Reverse polarity protection
- Output short circuit protection
- Excessive voltage protection
- Neoprene carry case included

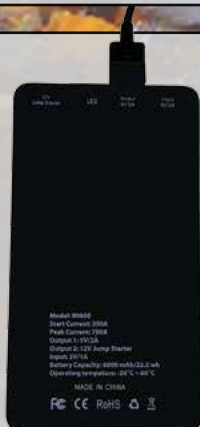

Start Current: 350A  
 Peak Current: 700A  
 Output 1: 5V/2A  
 Output 2: 12V Jump Starter  
 Input: 5V/1A  
 Battery Capacity: 6000 mAh/22.2 wh  
 Operating temperature: -20°C ~ 60°C