



JULY / AUGUST 2025



FEATURED **Suppliers**

Disinfectant

C26832 - 946mL Bottle

Heavy-Duty Cleaner/





Performance Tool





Reciprocating Saw Blade, Metal-CuttingPART#DESCRIPTION372624P56-Inch, 24TPI, 5 Pack372818P58-Inch, 18TPI, 5 Pack372618BB6-Inch, 18TPI, 50 Pack372118P512-Inch, 18TPI, 5 Pack



Forney Easy Weld 120V Welder Ideal for do-it-yourselfers (DIY),


maintenance, repair, metal fabrication, and hobbyists. Lightweight and portable



PART#	DESC.	
261	140 FC-i is a powerful flux-core wire welder	
271	140 MP is a 3-in-1 machine (Stick/MIG/TIG)	

(1 pair)

W41023

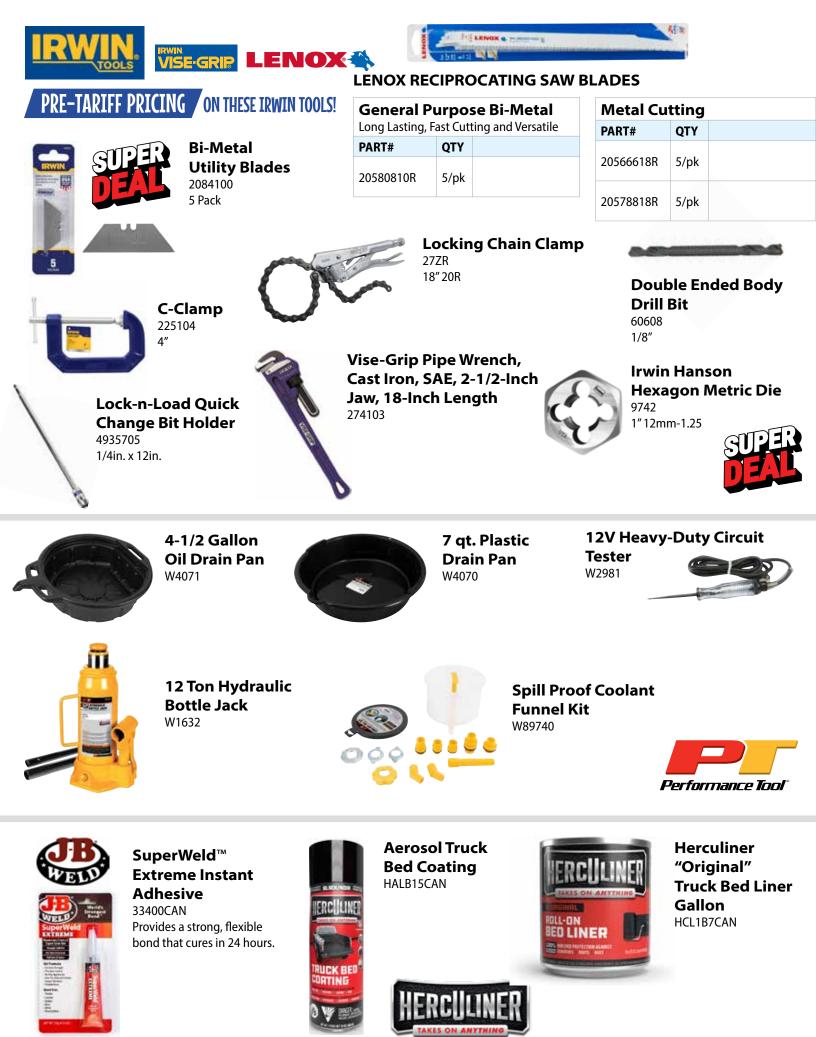





Forney 40 P Plasma Cutter, 120/230V

The Forney 40 P plasma cutter is your answer to cutting! This dual-voltage plasma cutter allows you to work wherever 120V and 240V power is available. The 20' torch allows for greater reach and the internal air pressure control ensures that you always have the right pressure. his powerful machine cleanly cuts up to 1/2" thick mild steel and stainless steel, and up to 3/16" thick aluminum. For a wide variety of cutting needs this plasma cutter has you covered! INCLUDED ACCESSORIES

20ft (6.09m) IPT-40 Plasma Torch 15ft (4.57m) Ground Clamp with Cable 15ft (4.57m) Input Cable Extra Contact Tips



Forney 140 MIG Welder, 120V

INCLUDES MIG gun with 10ft lead 10 ft ground cable & clamp Gas hose and regulator



Forney 180 ST Plus Stick TIG Welder

321 INCLUDES Forney 180 ST+ Stick/TIG Welder 6ft power cable 8ft stick electrode holder 8ft ground cable and clamp 120V-240V adapter cord Gas hose and regulator



MIG Welding Wire, Mild Steel

High strength mild steel MIG wire. Ideal for auto body repair and fabrication on most ferrous metals.

PART#	DESC.	SPOOL (LB)
42285	.024 in ER70S-6	10
42286	.030 in ER70S-6	10
42287	.035 in ER70S-6	10
42291	.030 in ER70S-6	2



Premium Self Shielded Flux-Core Welding Wire

Ideal for all-position welding, and best suited for single pass applications with high travel speed. No shielding gas required.

PART#	DESC.	SPOOL (LB)	
42300	.030 in E71T-GS	2	
42301	.030 in E71T-GS	10	









Slow-Moving Vehicle Emblems 71152

Warning Lights for Agriculture & Off-Highway Applications

PART#	DESCRIPTION	MOUNT
56150		Pedestal
56160	LED Amber Warning Lights	Surface
56170		Pedestal
56180	LED Red Stop Tail Turn Lights	Surface

Trilliant[®] LED Work Lights

PART#	DESCRIPTION	MOUNT	LUMENS	VOLTS	
64G01	T26 Far Flood, w/ Pigtail	Pendant	1800	10-48V	
63W41	CUBE Long Range	Pendant	3000	9-32V	
63Z61	LMX Close/Long Range Hybrid	Pendant	5000	9-32V	



LED Wireless Magnetic Towing Kit 99131-5







- Once cured GLOOZIT remains flexible, is able to withstand temperature changes/expansions and contraction of dissimilar materials
- Industrial Strength Adhesive & Sealant
- Gloozit bonds virtually everything
- UV resistant
- Remains flexible once cured
- Bonds to virtually anything
- Apply at room temperature

NLS Products Stock #	Size	Cost
8312 (Auto)		
8612 (Marine/RV)	90 mL	
8812 (Industrial)		



Putty.

Steel Reinforced Epoxy

Steel Hard in 15 Minutes

• 500°F temperature resistant

• Fully Cured in 1 hour

 Sets up under water Impervious to chemicals

One Product Does It All

Auto · Truck · Home · Marine · Hobbies · Plumbing

Permanently Adheres To:

- Steel
 Aluminum
 Wood
- Copper · Cast Iron · PVC
- ABS Bronze Concrete
- Plastics · Glass · Fiberglass
- Ceramics
 Brass & Much

More!

NLS Products Stock #	Size	Cost
16002	65 g	
6004	130 g	



Heavy Duty · Pure Blend Fast Penetrating Oil

Frees Frozen & Rusted Parts. Environmentally Friendlier. Canadian Food Inspection Agency Approved (CFIA # N184)

Solvent Free
 Non-Hazardous
 Silicone & Teflon Free

BreakThru® Fast Penetrating Oil is a highly refined oil-based product that infiltrates components quickly. Frees Frozen - Rusted Parts!

For Many Uses: Bolts · Engine Parts · Hinges · Locks · Bearings · Bicycle & Motorcycle Chains · Chains • Roller Wheels & Other Moving Parts • Aluminum • Chrome • Steel Surfaces • Guns • Fishing Equipment Industrial Machinery • Relays & Switches

· Tools & Many More.

NLS Products Stock #	Size	Cost
C10	370 g	





No sand blasting required

- Heat resistant up to 427°C (800°F)
 - · Apply directly over the rust
 - No sand blasting
 - · No scraping to bare metal
 - Works with any top coat paint

Engineered PATENTED primer to be applied directly over rusted metal, rusted painted metal, bare metal, galvanized metal, aluminum, tin & core tan steel.

NLS Products Stock #	Size	Approx. Coverage	Cost
73013	340 g	15 sq.ft.	
73005	18.9 L	1500 sq. ft.	



Line Terminator Block Off Kits





GM Air Conditioning Schrader Valve M12 X 1.50 800-955

3/8 In. OD x 48 In Aluminum Tube 800-627

Air Conditioning Line Connectors Line Splice For Aluminum Lines



PART#	SPECS	
800-641	For 3/8 In.	
800-643	For 5/16 ln.	
800-640	For 5/8 In.	



A/C Line Splice Kit for 5/8 Line With No.10 Hose 800-670



Engine Degreaser 75025 425 g aerosol



Dry Graphite Lubricant 75101 - 320 g aerosol



WORX

ENVIRONMENTAL

PRODUCTS, INC.

Oilfield Dry Moly Lube 1750744 - 311 g aerosol

36-0401 - 3.78

36-0613 - 384 ml

WOR



Power Clean Waterless Hand Soap

Waterless Hand Cleaner

SensorKleen™ Mass Air Flow Sensor Cleaner 75110 - 312 g aerosol



Posi-Trac[™] Limited Slip Gear Oil Additive 742508 - 207 mL tube





Rear Main Seal Repair 34240 - 500ml

Head Gasket Fix 31111 - 680g





Fuel, Exhaust & Emissions System Cleaner 34720 - 500ml

A STATE OF A STATE OF

26-1024 - 100ml





INDUSTRY LEADING SELECTION, PREMIUM O.E.M. FIT, FORM AND FUNCTION



WATER PUMPS • FUEL PUMPS

- Extensive Coverage for Domestic and Import Applications
- Engineered to Meet or Exceed O.E.M Specifications
- Manufactured from High-Quality Materials
- Thoroughly Tested for Maximum Performance and Reliability



RADIATORS • CONDENSERS • HEATER CORES

- Extensive Coverage for Domestic and Import Applications
- Engineered to Meet or Exceed O.E.M Specifications
- Drop-in Fit, Form and Function
- 100% Tested up to Three Times During Production



USMOTORWORKS.COM

